


1. Input Condition

- 1) Rated Voltage : PoE(802.3at), DC12V(AUX Input)
- 2) Variable Scope for Input voltage :
 - PoE (40~57V)
 - DC12V(Wired OR with Output)

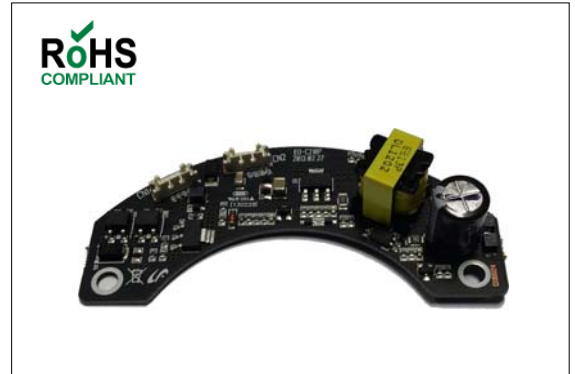

2. Output Ratings

- 1) Rated Voltage : +12V
- 2) Rated Current : 450mA (Typ.)
- 3) Regulated Output Current Variation : 0.1A ~ 0.5A
- 4) Regulated Output Voltage Variation : +11.4V~12.6V (By-pass when using EXT DC input)
- 5) Ripple & Noise : 200mVp-p (Max.)

3. Connector Pin Map

Pin No.	CN1 (TM1252S-04)
1	VA+
2	VA-
3	VB+
4	VB-

Pin No.	CN2 (TM1252S-04)
1	AUX INPUT (+12V)
2	GND
3	GND
4	+12V OUTPUT

4. Dimension (Unit mm)

